




Insignia NS-B4111 Motherboard Replacement

Prerequisite Only.

Written By: Kristin Yoshioka

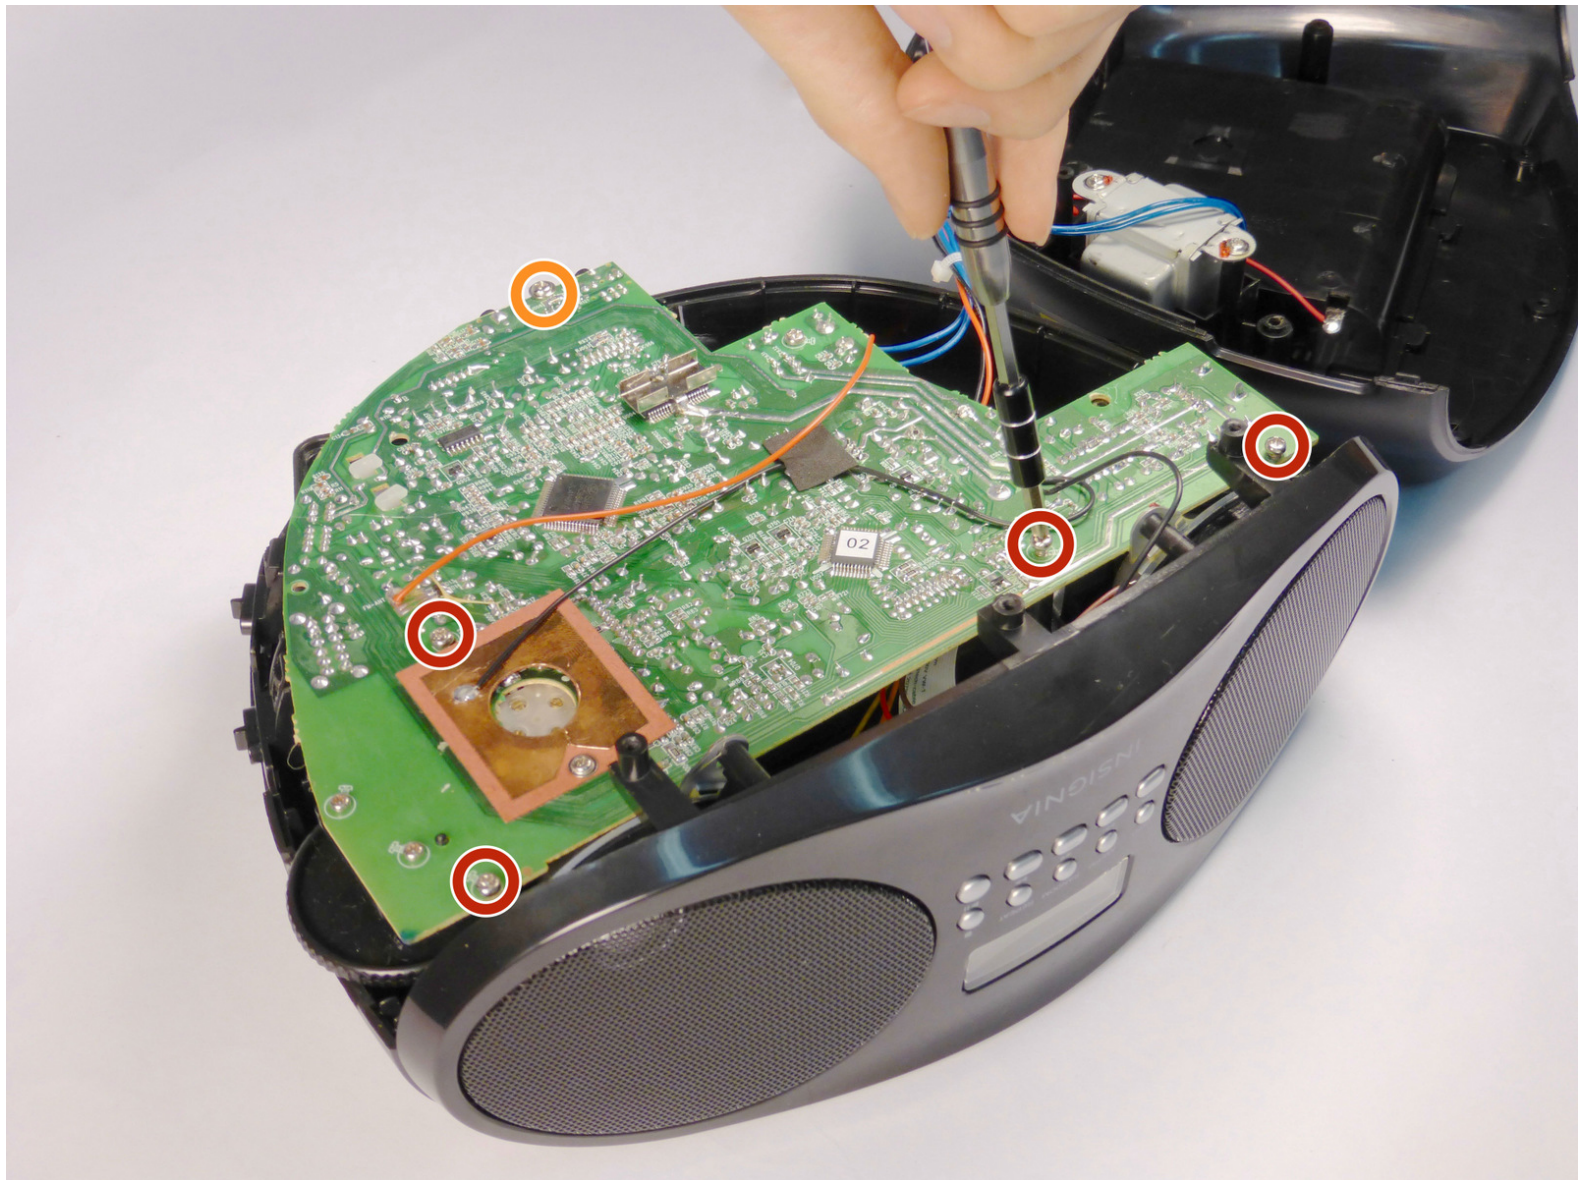




TOOLS:


- [Soldering Station](#) (1)
 - [26 Bit Driver Kit](#) (1)
-

Step 1 — Motherboard

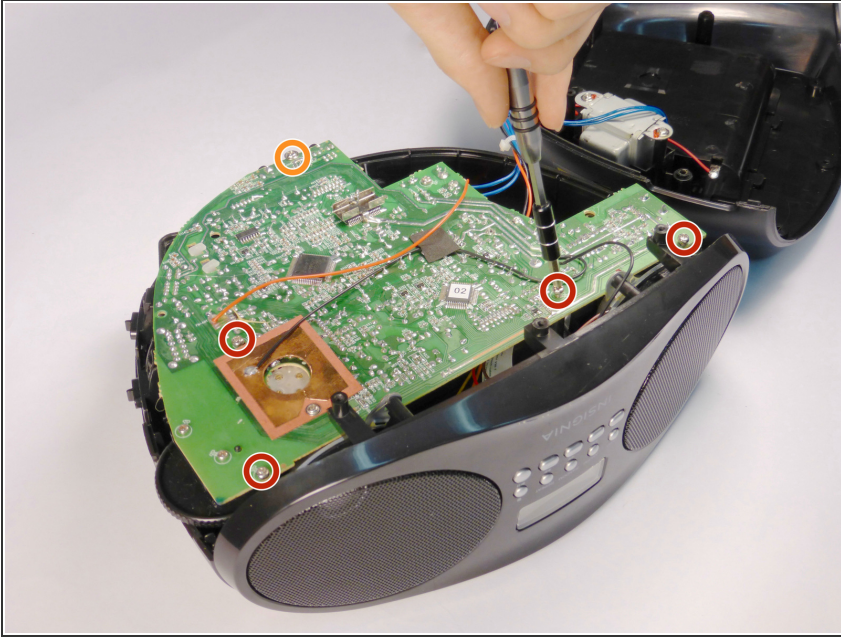


- Unscrew the four 12.5mm screws with the Phillips PH1 Screwdriver.
- Unscrew the one 10mm long screw with the Phillips PH1 Screwdriver.

Step 2

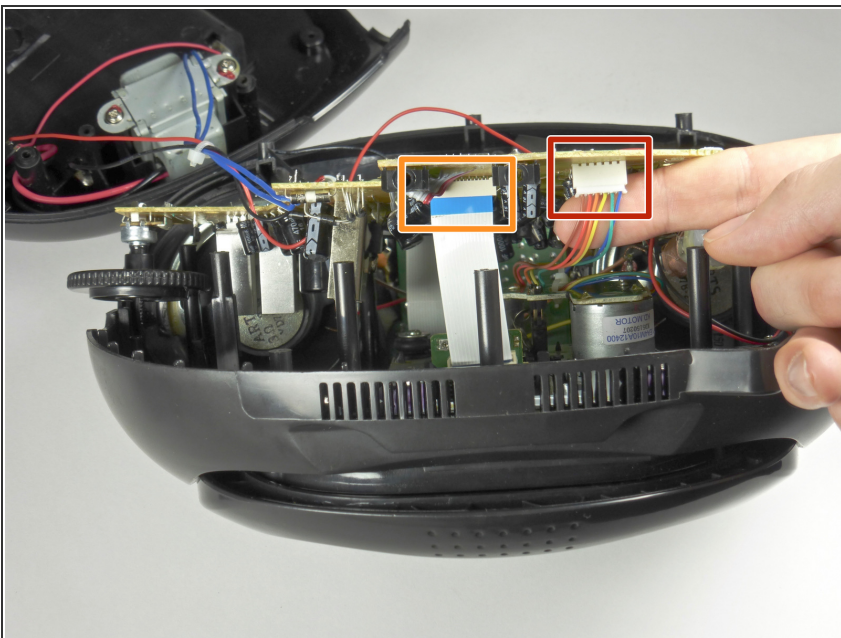


- Orient the device so that the back is facing you.
- Unplug the six pin male/female header from its socket on the motherboard. The wires on the header are these colors: burgundy, red, orange, yellow, green, and blue.
- ⓘ Use a tweezer if you find it hard to pull the header out with your fingers.
- Gently pull out the ribbon cable from its socket on the motherboard.
- ★ Pay attention to the orientation of the header and the ribbon cable. Replacing the wires the wrong way may short circuit the board.

Step 3

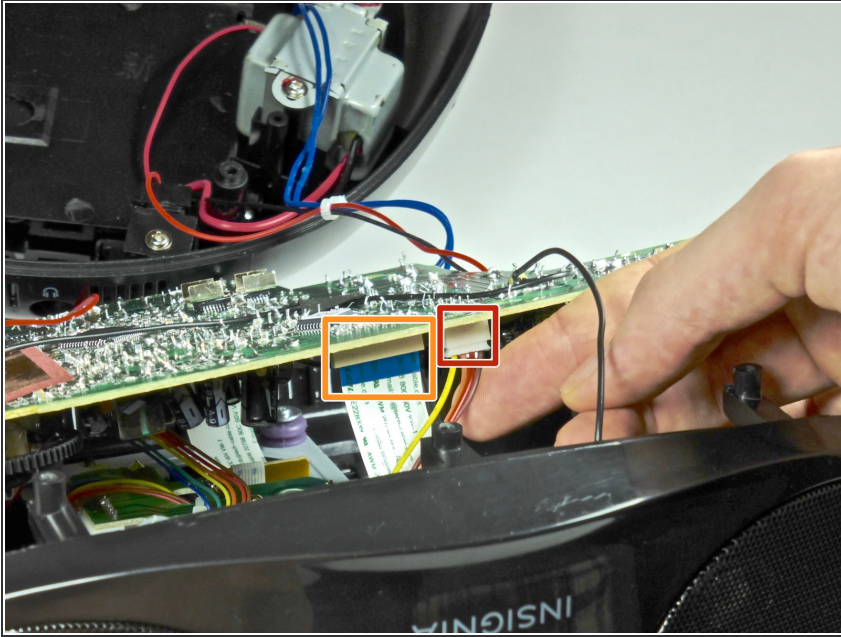

- Rotate the device so that the front is facing you.
- Unplug the four pin header from its socket on the motherboard. The wires on the header are these colors: brown, red, orange, and yellow.
- ⓘ Use a tweezer if you find it hard to pull this header out with your fingers.
- Gently pull out the ribbon cable from its socket.
- ★ Pay attention to the orientation of the header and the ribbon cable. Replacing the base the wrong way may short circuit the board.

Step 4

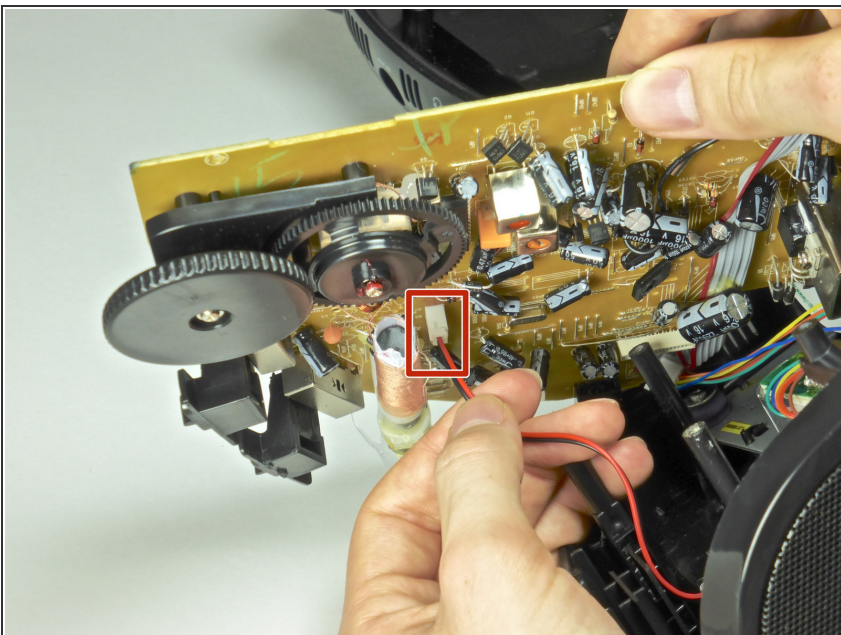

- Pull out the two pin header from its socket on the motherboard. The wires on this header are black and white.
- ⓘ Use a tweezer if you find it hard to pull this cable out with your fingers.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-28 12:12:26 PM.